


Four Point Contact Ball Bearing

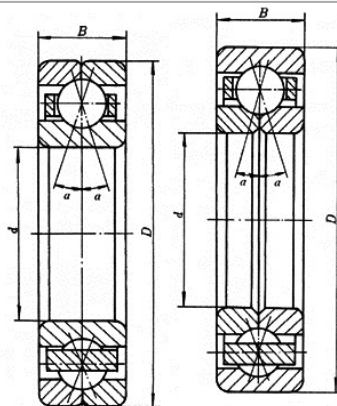

كثلة كجم	الحد من السرعة (دورة في الدقيقة)	تقديرات الحمل الأساسية (كيلو نيوتن)	الأبعاد الحدودية (مم)	تحميل رقم
زيت	شحم	(ثابت) كور	(ديناميكي) كور	ب: د: د:
9000	6700	31.2	44.5	19 72 30 QJ306
8000	6000	37.2	53.2	21 80 QJ307
9000	6700	37.0	40.5	18 85 QJ208
6700	5000	44.8	55.5	20 110 QJ210
6700	5000	8.0	85.0	27 100 QJ310
7000	5300	62.0	71.0	21 120 QJ211
5300	4000	86.5	115.0	29 110 QJ311
6300	4800	71.0	8.1	22 130 QJ212
4500	3400	102.0	105.0	24 125 QJ214
5600	4300	91.5	98.0	35 150 70 QJ314
5300	4000	98.0	108.0	25 130 75 QJ215
3600	2600	210	188	41 180 85 QJ317
4300	3200	102	130	24 140 90 QJ1018
4300	3200	165	150	30 160 QJ218
3400	2400	238	228	43 190 QJ318
3800	2800	212	192	34 180 100 QJ220
4000	3000	150	195	28 170 110 QJ1022
3400	2400	255	245	38 200 QJ222
3000	2000	328	345	50 240 QJ322
3200	2200	152	208	28 180 120 QJ1024
3200	2200	280	275	40 215 QJ224

Four Point Contact Ball Bearing

QJ324		260	55	392	352	1600	2200	15.3
QJ1026	130	200	33	230	202	2000	2700	-
QJ226		230	40	290	288	1900	2800	7.28
QJ1028	140	210	33	242	205	1900	2600	-
QJ228		250	42	352	292	1500	2000	10.5
QJ328		300	62	512	422	1300	1800	22.4
QJ1030	150	225	35	275	225	1800	2400	4.59
QJ230		270	45	372	302	1400	1900	12.4
QJ1032	160	240	38	318	260	1600	2200	-